



DT-7000

# P2600 Series

Compact cash deposit machine



Efficient Application



Affordable Expense



Reliable Quality & Durability



Compact Design



Convenient & Secure Transportation

P2600 series contains different compact deposit models, which can accurately manage the large cash deposit process in different environments. They deliver a safe and convenient cash manage solution not only suitable for financial institutions and retail industry but also for where heavy cash transactions take place. P2600 series integrated with latest management system makes mobile monitor possible which greatly increased the security and convenience. It is the ideal solution for retail back office deposit, bank branch teller automation and CIT resource optimization.

# P2600 Series Compact cash deposit machine

## Features

**Intrinsic Performance:** High banknotes processing speed (up to 720 pieces per minute) together with large infeed hopper capacity (500 notes) considerably reduce deposit time. Optimized transit path and algorithm ensure ultra-low jam rate.

**Premier Security:** UL291 Level 1 safe and remote monitoring software solution ensure a secure transaction environment. Biometric solution is available on P2600, which enables P2600 series to be more secure for different environments.

**Flexible Configuration:** P2600 series can be configured with EPP and contactless card reader. Different P2600 is configured with different deposit capacity for various scenarios.

## Specifications

### Controlling Unit

- Intel® Celeron® J1900 2.0 GHz 4 Cores CPU, 4G RAM
- 128G HDD
- Windows® 7
- Support: LAN, COM & USB
- Optional: Android

### Banknote Processing Unit

- Bulk Note Deposit Module:
  - Processing Speed: 720 notes/minute
  - Entrance Capacity: 500 notes
- Support Envelope deposit: C6 162mm \* 114mm
- Cash Reject Capacity: 100 notes
- Escrow Stacker: 200 notes

### Communication


- Standard TCP-IP connection

### Security

- Physical:
  - Lock options: No lock, Mechanical lock, Electronic lock
  - Standard UL291 Level 1 safe, Reserved Position to Fix E-lock

### Working Environment

- Temperature:
  - Indoor: 32°F(0 °C) to 104°F(40°C)
- Relative humidity: 20% to 90% non-condensing

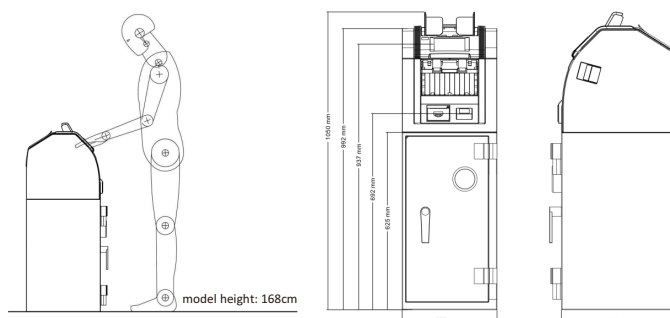

Items	P2600L	P2600	P2600S
Capacity	Up to 15,000 notes	Up to 9,000 notes	Up to 3,000 notes
Screen	7"	5"	5"
Biometric	Fingervein (opt).	/	/
Barcode scanner	Optional	Optional	Optional
Safe	UL-291	UL-291	UL-291
Maintenance	Front	Front	Rear
Receipt printer	58mm thermal printer	58mm thermal printer	58mm thermal printer
EPP & Card reader	Optional	/	/
Size(D*W*H)	410mm*440mm*1240mm	410mm*350mm*1040mm	425mm*350mm*753mm
Weight	242KG	176KG	128KG

\*The actual capacity is subject to the thickness and fitness of local currency.



### GRGBanking Equipment Co., Ltd.

9,11 Kelin Road, Science City, High-tech Industrial Development Zone,  
Guangzhou, China 510663  
Tel: +86-20-6287 8545  
Fax: +86-20-6287 9976  
E-mail: atm@grgbanking.com

Specifications are subject to update without prior notice.  
Please consult GRGBanking or its representative for the latest information.